



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B01F 3/00, 7/12, 7/28</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/36163</b> <b>(43) International Publication Date:</b> 22 July 1999 (22.07.99)
<b>(21) International Application Number:</b> PCT/SE99/00050 <b>(22) International Filing Date:</b> 15 January 1999 (15.01.99) <b>(30) Priority Data:</b> 9800107-6 19 January 1998 (19.01.98) SE <b>(71) Applicant (for all designated States except US):</b> NOVASEPTIC EQUIPMENT AB [SE/SE]; Rödjans väg 7, S-449 34 Nödinge (SE). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> ÅRTHUN, Nils [SE/SE]; Sockenvägen 12, S-430 90 Öckerö (SE). JOHANSSON, Sten [SE/SE]; Smedlyckan 18, S-425 43 Hisings Kärra (SE). SAMUELSSON, Håkan [SE/SE]; Barkassvägen 40, S-439 35 Onsala (SE). <b>(74) Agent:</b> AWAPATENT AB; P.O. Box 11394, S-404 28 Göteborg (SE).		<b>(81) Designated States:</b> AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Swedish).</i>
<b>(54) Title:</b> A DEVICE FOR IN-VESSEL TREATMENT		
<b>(57) Abstract</b>		
<p>The present invention relates to a device for treatment of material in a vessel (1), particularly for dispersion or homogenisation of liquids, or for suspension of solids in liquids. The device comprises a treatment element (10) that is rotationally mounted in the vessel (1) and that has an essentially tubular configuration comprising two ends. The jacket (15) of the treatment element has a plurality of cuts (11) formed with sharp edges (12), which may be drawn through the material in the vessel as the treatment element rotates, in order to transfer shearing forces to said material. The shearing forces produce the desired treatment in the vessel (1).</p> <div data-bbox="954 1129 1364 1890" data-label="Image"> </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A DEVICE FOR IN-VESSEL TREATMENTField of the Invention

The present invention relates to a device for in-vessel treatment of material, particularly for dispersion or homogenisation of liquids, or for suspension of solids in liquids, of the kind comprising a treatment element that is rotationally mounted in the vessel.

Background of the Invention

In mixing liquids in a vessel, a rotary stirrer usually is used, for example a stirrer having radially outwardly directed vanes. A stirrer of this kind is adapted to transfer energy to the liquid in two ways. Firstly, the liquid is set in motion as the vanes are drawn through liquid, whereby a laminar flow is created. Secondly, the liquid is affected by shearing forces at the vane edges, which causes turbulence.

In some situations, the mixing process is dependent on the presence of extremely strong shearing forces. This is true in the dispersion or homogenisation of liquids that do not spontaneously form a solution (for example oil in water) and in suspending powdered solids in a liquid (such as flour in water). The considerable shearing forces are required to break up for example drops of oil or lumps of flour into atomised particles through "whipping". When conventional stirrers are used, a very large moment of force is required to deliver shearing forces of this magnitude.

US A 5 205 647 suggests a solution to the above problem. The mixing apparatus described therein has a cylindrical casing, in which is attached a sleeve formed with oblong slots, and a cylinder rotationally mounted in the casing. The cylinder is formed with through-bores extending in the cylinder material in parallel with the cylinder axis, and apertures extending between the bores and the exterior of the cylinder. The mixing apparatus

operates by introducing liquids through two inlets while the cylinder is rotating. The liquids are introduced into the bores and thereafter are passed through the apertures to the exterior of the cylinder and thereafter through the oblong slots in the casing to finally exit through an outlet in the casing. On their route, the liquids are exposed to shearing forces.

In accordance with another prior-art apparatus two concentric cylinders are arranged to rotate relative to one another, for example inside a tank. The cylinders are formed with through-outlets and are disposed sufficiently closed to one another to ensure that a scissors-like force is produced, when they rotate relative to one another. Liquid subjected to this scissors-like force is affected by considerable shearing forces.

Several disadvantages are connected with the prior-art technique described above. The apparatuses comprise several components, which are movable relative to one another and between which the spacing by necessity must be extremely narrow if the large shearing forces are to be produced. The manufacturing tolerances as well as the assembly and mounting tolerances with respect to the discrete components therefore are extremely small.

Should some components happen to come into contact with one another during the rotation, there is a risk that particles may separate from the contacting components and pollute the liquid to be mixed therewith. In case of heavy contact, there is also a risk that the apparatus may be seriously damaged.

Considering the large number of components that must be produced, mounted and made to co-operate with a high degree of precision in order to produce the desired effect, the apparatuses become expensive to manufacture and to maintain.

In addition, the narrow spaces formed between the various components are difficult to clean. Particles and viscous liquid may get trapped in these narrow spaces and

form obstructions, which impairs the functional ability of the apparatus

Summary of the Invention

One object of the present invention is to provide a device for in-vessel treatment, which is capable of efficiently mixing, dispersing and/or homogenising liquids under the conditions outlined above without requiring a large moment of force. By "liquid" as used herein should be understood all fluid substances (media?) as also liquids/fluids containing solid particles.

A second object of the invention is to provide an easy-to-clean apparatus for in-vessel treatment.

A third object of the invention is to provide an apparatus for in-vessel treatment that does not require a large number of components that are movable relative to one another.

A fourth object of the invention is to provide an apparatus for in-vessel treatment that is inexpensive and simple to manufacture.

These and other objects are achieved according to the invention by means of an apparatus of the kind defined in the introduction hereto and which is characterised in that the treatment element essentially is of tubular configuration and is formed with a plurality of cuts formed with sharp edges which are drawn through the material in the vessel as the treatment element rotates, in order to transfer shearing forces to said material.

Upon rotation of the treatment element in liquid, the sharp edges thereon generate a resistance force, as they move through the liquid. Because of the sharpness of the edges, the motion of the latter affects the liquid by means of shearing forces, and the moment of force required to rotate the treatment element consequently is transferred to a very high extent to the liquid in the form of shearing forces.

The treatment element preferably is cylindrical and is mounted for rotation about its centre axis. Resistance

against the rotary motion then is generated almost exclusively from the sharp edges, since the rest of the treatment element is configured as a rotationally symmetrical element.

5        In addition, the treatment element can be configured as a multi-piece element. For example, it may be designed in the form of several cylinder sectors, or in the form of several concentric cylinders. In addition one or both ends of the treatment element may be formed with inwardly  
10        directed flanges. Alternatively, the treatment element may be formed with a barrel-shaped contour configuration, presenting smaller radii at its ends than in its in-between parts. Owing to this configuration, it becomes more difficult for liquid that is forced against the  
15        jacket of the treatment element to flow axially along the jacket of the treatment element and across the edge of the latter, and in consequence thereof the liquid is instead forced to pass through the cuts.

         In addition, the cuts may be formed with shovel  
20        means the mouths of which are orientated in the direction of rotation of the treatment element, which mouths are formed with sharp edges. Preferably, the shovel means are formed on the inner face of the treatment element. In the course of rotation of the element, the shovel means urge  
25        liquid to pass from the inner face of the treatment element, through the cuts to the external face of the treatment element. In addition, the shovel means contribute to setting the liquid in a rotary motion, whereby the centripetal force will convey liquid radially out-  
30        wards, towards and through the cuts formed in the jacket of the treatment element. Altogether, a pumping action is produced, which makes liquid flow past the sharp edges.

         Preferably, the treatment element is fitted on a stirrer or mixer having several radially outwardly  
35        directed vanes. Preferably, the treatment element is mounted on the tips of the vanes, whereby the treatment element will form a cylindrically shaped enclosure around

the stirrer/mixer. The vanes generate a rotary motion of the liquid in consequence whereof the centripetal force will transport liquid and particles radially outwards, away from the hub of the stirrer/mixer. The flow through  
5 the cuts, and thus the flow past the sharp edges, therefore will be larger.

#### Brief Description of the Drawings

The invention will be described in more detail in the following with reference to the accompanying  
10 drawings, wherein

Fig 1 is a view from above of a presently preferred embodiment of the device in accordance with the invention,

Fig 2 is an enlarged view of the area marked II in  
15 Fig 1,

Fig 3 is a lateral view of the device of Fig 1, mounted on an electric motor,

Fig 4 is an enlarged view of the area marked IV in Fig 3, and

20 Fig 5 is a longitudinal sectional view through a vessel fitted with a device according to Fig 3 and located at the vessel bottom.

#### Description of a Preferred Embodiment

Fig 5 illustrates a vessel intended for mixing  
25 liquids, preferably a tank 1 made from sheet metal or plastic, preferably stainless steel or the like. The tank 1 is formed with a circular opening 2, in which is mounted a circular disk 3 having a male coupling 4, which projects into the tank interior. A flange 5 is attached,  
30 preferably by means of welding, to the rim of the opening 2 so as to extend peripherally around the disk.

Furthermore, the disk 3 is attached, for examples by means of screws, to a preferably electric motor 6, the shaft of which extends from the outer face of the tank 1  
35 and is connected to a male coupling 4. Inside the tank, a stirrer 7 is rotationally mounted on the male coupling 4, said stirrer arranged to receive moment of force from the

motor 6 by way of a magnetic drive of known configuration.

The motor 6 need not be electrically driven but alternatively could be e.g. pneumatically or hydraulically driven. In addition, the motor 6 may drive the stirrer 7 directly, i.e. not via a magnetic drive, and furthermore a gearbox may be inserted between the motor and the stirrer in order to provide the desired gear ratio between the rotational speeds of the stirrer and the motor, respectively. Instead of the motor 6 being positioned as illustrated it may be spaced from the tank 1 and drive the stirrer 7 for example by a belt-drive arrangement or some similar type of force transmission.

The stirrer 7 is formed with radially outwardly projecting vanes 8, which are mounted at a slight angle axially. On the ends 9 of the vanes, a treatment element 10 in accordance with the present invention is attached, preferably by means of welding.

In accordance with the preferred embodiment, the treatment element 10 is configured as a cylindrical ring 1, which preferably is made from thin sheet metal, preferably stainless steel of the like. The jacket 15 of the cylinder 10 is formed with a number of through-holes 11 having sharp edges 12. In accordance with the preferred embodiment, the holes 11 are arranged in axially extending rows alternately comprising five and four holes.

The cylinder 10 may be produced for example by punching the holes 11 from a sheet-metal strip, the long sides of which are thereafter bent into an annular shape. Therefore, the joint formed along the contacting short sides of the bent strip can be welded together.

The holes could also consist of the meshes in a net produced by expanding a material, in which through-slits have been made, which after the expansion form the sharp edges.

On the inner face of the cylinder 10, at each hole 11, shovels 13, having sharp edges 14, are formed. Preferably, these shovels 13 are formed in conjunction with the punching of the holes 11.

5        When the motor 6 drives the stirrer 7, as mentioned previously by magnetic drive or the like, the cylinder 10 is being rotated about its centre axis. This draws the shovels 13 through the liquid, the shovel mouths being orientated in the direction of rotation A, and the sharp  
10 shovel edges 14 transfer part of the moment of force of the stirrer 7 to the liquid in the form of a shearing force. The shovels 13 transport the liquid further, from the inner face of the cylinder 10, through the holes 11 in the jacket 15 and to the exterior of the cylinder 10.  
15 The sharp edges 12 of the holes 11 transfer shearing forces to the liquid in the same manner as do the sharp edges 14 of the shovels 13.

The vanes 8 of the stirrer 7 set the liquid in a rotary motion, whereby the liquid pressed outwards by the  
20 centripetal force, against the jacket of the cylinder. The rotary motion is strengthened at the inner face of the cylinder 10, where the shovels 13 contribute to setting the liquid in rotation.

In all, a pumping effect is created, causing liquid  
25 enclosed by the rotating cylinder 10 to be kept rotating and consequently to be forced by the centripetal force outwards, against the inner face of the cylinder 10. The shovels 13 contribute to this effect and then transport the liquid from the inner face of the cylinder 10,  
30 through the holes 11, to the exterior of the cylinder 10. During this transport, the sharp edges 14 of the shovel mouths and the sharp hole edges 12 transfer part of the moment of force of the stirrer 7 to the liquid in the form of shearing forces.

35        The shearing forces cause efficient mixing of liquids, also in the case of dispersion or homogenisation

of liquids that do not easily form solutions, as also in the case of suspension of solids in liquid.

It will be appreciated that several modifications may be made to the embodiment described above within the  
5 scope of protection as defined in the appended claims.

For example, the positions of the holes as well as their numbers could be varied. In addition, a shovel may be configured so as to extend across several holes.

Furthermore, the cylinder may be shaped as a barrel  
10 or be formed with inwardly directed flanges at one or both ends, thus to counteract the tendency that liquid be forced to move axially along the jacket but instead be made to pass through the holes.

The treatment element could also consist of several  
15 parts, such as a number of concentric cylinders.

## CLAIMS

1. A device for treatment of material in a vessel (1), particularly for dispersion or homogenisation of liquids, or for suspension of solids in liquids, of the kind comprising a treatment element (10) that is rotationally mounted in the vessel (1), characterised in that the treatment element (10) essentially is of tubular configuration and is formed in its jacket (15) with a plurality of cuts (11) formed with sharp edges (12), which are drawn through the material in the vessel as the treatment element rotates, in order to transfer shearing forces to said material.

2. A device as claimed in claim 1, characterised in that the treatment element (10) preferably is cylindrical and is mounted for rotation about its centre axis.

3. A device as claimed in claim 1 or 2, characterised in that the treatment element (10) is divided into at least two separate pieces.

4. A device as claimed in any one of the preceding claims, characterised in that at least one of the ends of the treatment element (10) is formed with an inwardly directed flange.

5. A device as claimed in any one of the preceding claims, characterised in that the treatment element (10) has a barrel-shaped contour configuration.

6. A device as claimed in any one of the preceding claims, characterised in that the cuts (11) are formed with shovel means (13), the mouths of which are orientated in the direction of rotation (A) of the treatment element, said mouths being formed with sharp edges (14).

7. A device as claimed in claim 6, characterised in that the shovel means (13) are positioned on the inner face of the jacket (15).

8. A device as claimed in any one of claims 1-5,

c h a r a c t e r i s e d in that the cuts are the meshes of a net formed by expanding a material, in which through-slits have been made, said slits forming said sharp edges.

5           9. A device as claimed in any one of the preceding claims, c h a r a c t e r i s e d in that the treatment element (10) is fitted on a stirrer (7) having vanes thereon, said stirrer arranged to be driven via magnetic drive by a drive means (6) situated on the exterior of  
10 the vessel (1).

          10. A device as claimed in claim 9, c h a r a c -  
t e r i s e d in that the vanes (8) of the stirrer (7) are directed radially outwardly, and in that the treat-  
ment element 10 is mounted on the outer ends (9) of these  
15 vanes (8).

1/2

Fig. 1

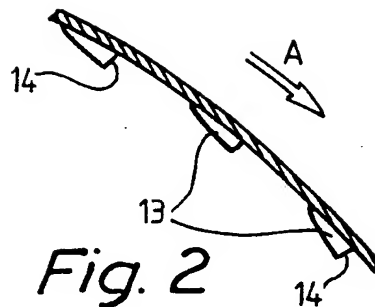
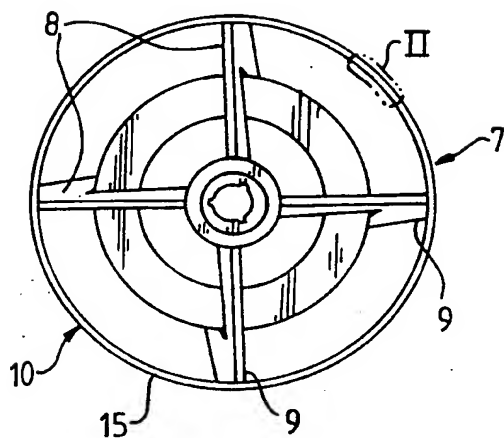


Fig. 2

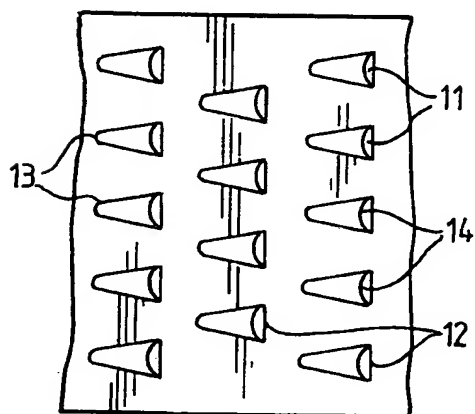


Fig. 4

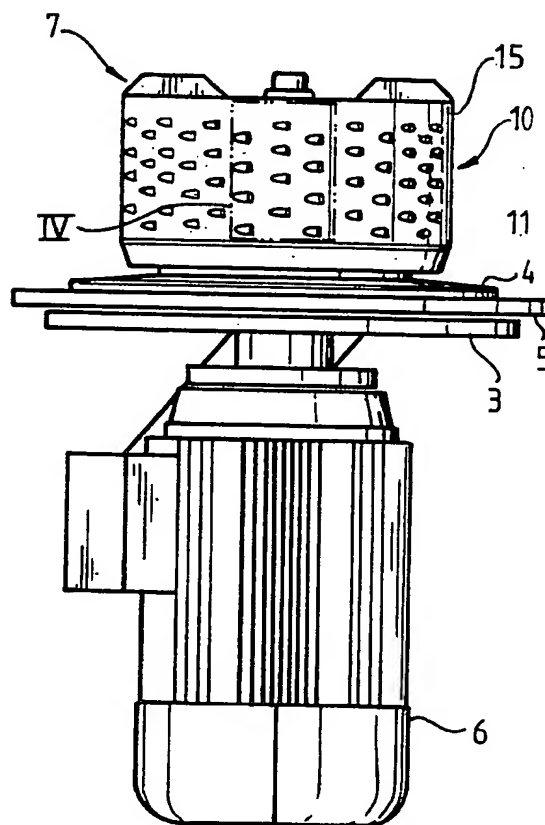


Fig. 3

2/2

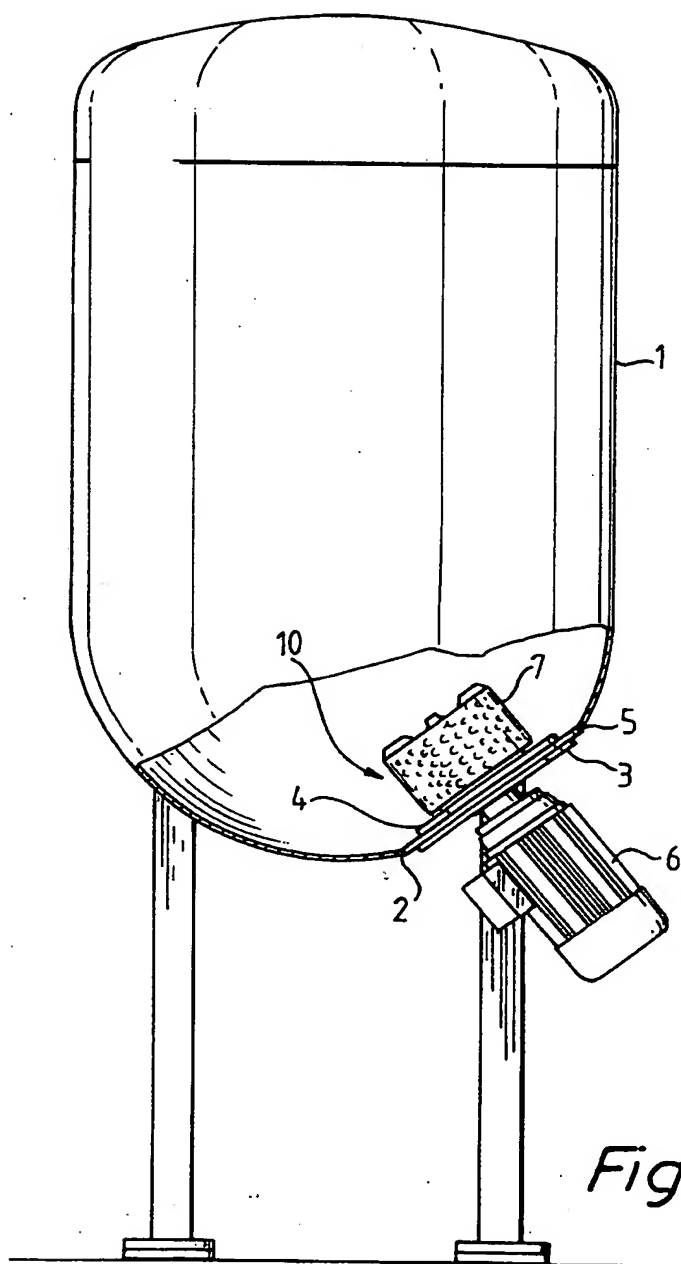


Fig. 5

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00050

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B01F 3/00, B01F 7/12, B01F 7/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ, US FULLTEXT

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5205647 A (RONALD J. RICCIARDI), 27 April 1993 (27.04.93), figure 1, abstract  --	1-10
A	DE 3912190 A1 (URBAN, GOTTFRIED), 23 November 1989 (23.11.89), figure 1, abstract  -- -----	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

5 May 1999

Date of mailing of the international search report

24 -05- 1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Wiva Asplund  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

07/04/99

International application No.

PCT/SE 99/00050

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5205647 A	27/04/93	AU 644974 B	23/12/93
		AU 2588892 A	03/05/93
		CA 2093556 A,C	10/04/93
		DE 69223944 D,T	27/08/98
		EP 0564611 A,B	13/10/93
		JP 2533742 B	11/09/96
		JP 6503513 T	21/04/94
		WO 9306919 A	15/04/93
<hr/>			
DE 3912190 A1	23/11/89	NONE	
<hr/>			